

Uniclass
L5367:P71

EPIC
E482:X71

CI/SfB
(71.3) Tn6

V.3

COBA
flooring



Your Project, Our Passion.



COBA Flooring is the specialist commercial flooring division of COBA Europe Ltd, dedicated to meeting the demands of our expanding entrance matting business.

Our BIM-ready product range continues to evolve on the back of our success in the commercial flooring sector. It broadly spans PVC/carpet entrance tiles (available ex-stock), custom made aluminium entrance systems (manufactured in the UK), as well as a selection of interlocking flooring solutions.

Our knowledgeable Sales and Customer Service teams work closely with our clients and their partners throughout every phase of the specification and purchasing process. These include architects, specifiers, quantity surveyors, interior designers, flooring contractors and facilities managers. Through innovation and design/manufacturing expertise, we can very often support projects by providing cost-effective value engineered flooring solutions for a range of commercial environments.

Entrance matting should never be an after-thought. We feel passionately that if the right floor matting is specified first time, the benefits can be felt further down the line – from initial cost savings through to reduced cleaning and replacement expense.

As part of the dynamic COBA International group of companies with localised facilities in Germany, Slovakia, Poland, Spain and South Africa, you have the reassurance that you are dealing with a professional, global name in the business; one that has many years' experience in the floor matting industry, and is here to help you every step of the way in delivering you the perfect flooring solution.



CAPPUCINO

EXPERIENCE OF MOMENTS ON T
WALL OF MATH


How to specify entrance matting

The guide is intended to assist you in making the right choice of entrance matting first time around. Our Sales team is also on hand to answer any queries and arrange site surveys for the most accurate product specifications.

Look out for the icons throughout the brochure, to narrow down which products will suit your environment.

Zones

We recommend a zoning system when choosing your entrance matting. Creating three zones delivers optimum dirt barrier performance, ensuring interior floors are kept clean and hazard free.

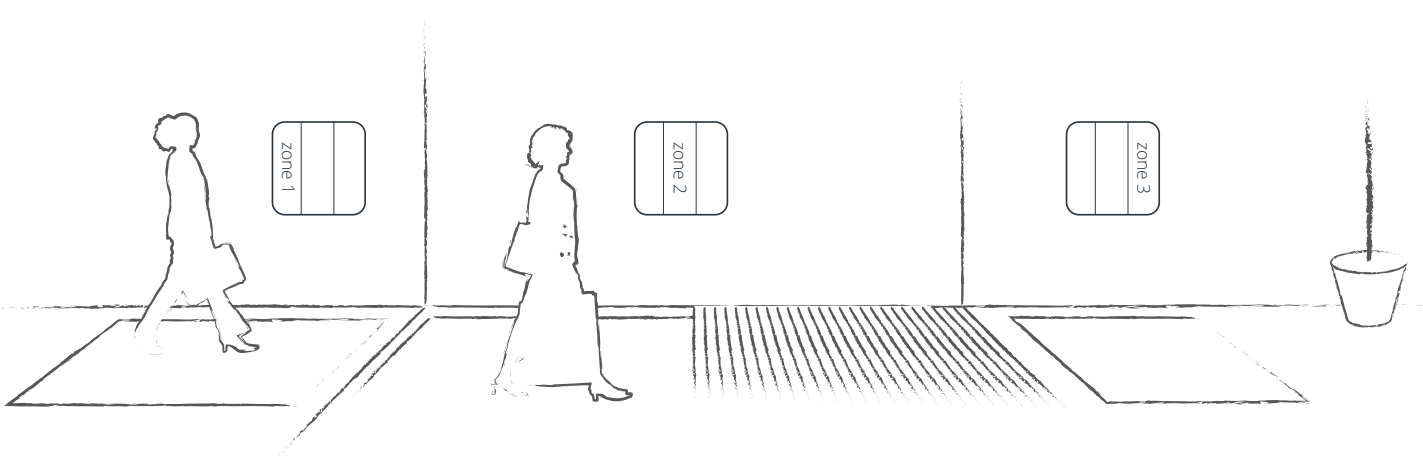

Pedestrian Traffic

It is important that matting is a sufficient length to allow moisture and debris to be wiped off footwear as people walk across the mat. Our COBA Flooring team recommends a minimum of six footsteps for this to be effective.

Wheeled Traffic

Depending on the nature of the building, the entrance may have to contend with different types of wheeled traffic. It is important that all matting complies with DDA Regulations/The Equality Act, so that wheelchairs can safely move on and off.



Less than
80 people per hour
3-4 metres



Up to 400
people per hour
6-7 metres



Around 800
people per hour
8-10 metres



Around 2,500
people per day
9-12 metres



Light
Suitcases,
Wheelchairs



Medium
Supermarket
Trolleys,
Sack barrows,
Luggage trolleys



Heavy Duty
Supermarket
Cages, Pallet
Trucks



Max Duty
Forklift Trucks,
Hydraulic
Cranes

Contaminant

Some products are more effective than others for removing dirt or moisture. Use these icons to determine which.





Warranty

Some of our entrance matting products carry limited warranties. All warranties we offer cover improper material or workmanship placed under normal conditions. Please note that some warranties apply only to specific parts of a product.



Environment







COBA Europe Ltd holds an ISO 14001:2004 certificate in recognition of the organisation's Environmental Management System.

Our successful 'Forest Floor Initiative' has enabled COBA Flooring to support the planting of some 250 trees in The National Forest in 2015 alone, as part of a project to transform 200 square miles of land in the heart of England.

Supporting



Entrance Matting Selector

Product and Page		Warranty	Zone			Contaminant	
							
		1,3,5 or 10 years	External	Intermediate (Matwell)	Internal (Surface)	Moisture	Dirt
Plan.a	10	10		✓	✓	✓	✓
Plan.a (PVC Inserts only)	10	10	✓	✓		✓	✓
Plan.b	11	5	✓	✓			✓
Plan.c	12	10		✓		✓	✓
Premier Rib	15	5	✓	✓			✓
Premier Plus	16	5		✓			✓
Premier Track	17	5		✓		✓	✓
Premier Grip	18	5		✓			✓
Premier Surface	19	5		✓	✓	✓	✓
PathMaster	20	5		✓		✓	✓
PathMaster Budget	21	3		✓		✓	✓
PathMaster Duo	22	3		✓		✓	✓
Toughrib Contract	24	1		✓	✓	✓	✓
Toughrib Diagonal	25	1		✓	✓	✓	✓
Alba	26	3			✓	✓	✓
Needlepunch	27	1			✓	✓	✓
Treadwell	28	3	✓	✓	✓	✓	✓

Pedestrian Traffic

Wheeled Traffic



Low	Medium	High	Very High	Light	Medium	Heavy	Max Duty
	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓
	✓	✓		✓	✓	✓	
		✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓	✓	
	✓	✓		✓	✓	✓	
	✓	✓	✓	✓	✓	✓	
✓	✓	✓		✓	✓	✓	
	✓	✓		✓	✓	✓	
✓	✓	✓		✓	✓	✓	
✓	✓			✓	✓		
✓				✓			
✓				✓	✓		
✓	✓			✓	✓		
✓				✓	✓		
✓	✓	✓		✓	✓	✓	

Plan Range

Looking for the wow factor? The 'plan range' is a stylish collection of high performance, eco-friendly aluminium entrance systems available in an range of colours, designs and surface finishes.







Plan.a

Versatile aluminium entrance matting



- Robust, high-quality aluminium system for heavy-duty use.
- Profile made using 30% recycled aluminium.
- Flexible, yet durable PVC linking joints for ease of handling/fitting.
- Three surface options available – 20mm strip inserts of either carpet or PVC scrapers.
- Choose from one, or a combination of, surface options.
- Custom-made to order.

Material:	Aluminium rails. PVC connections strips. Polyamide, Polypropylene or PVC inlays
Surface Finish:	Carpet or scrapers
Product Height:	10mm to 23mm
Durability:	Heavy to very heavy traffic entrances
Environmental Resistance:	Suitable for wet and dry environments.
UV Resistance:	Yes
Typical Applications:	Inside / Outside use - differs per inlay.
Installation Method:	Rollable
Flame Retardancy:	Flammability to EN 13501-1: Class Cfl - s1.
Country of Origin:	UK


Alba - Premium Nylon Carpet



Anthracite



Blue



Grey



Brown

Needlepunch - Economical Polypropylene Carpet



Charcoal



Grey

PVC Scraper




Black




Standard Profile

Open Surface Profile

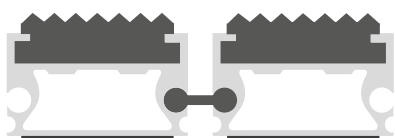

Closed Surface Profile

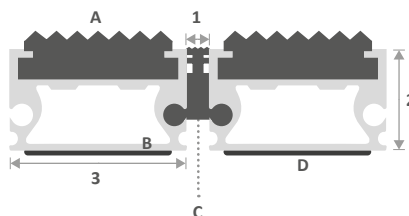

Material Key

- A Carpet / PVC inserts
- B Aluminium
- C Flexible PVC connector
- D Foam cushion

Dimensions


- 1 4mm
- 2 17mm
- 3 30mm

Low Profile

Open Surface Profile



Closed Surface Profile




Material Key

- A Carpet / PVC inserts
- B Aluminium
- C Flexible PVC connector
- D Foam cushion


Dimensions

- 1 4mm
- 2 9mm
- 3 40mm


Finishing Accessories




Ramped Edging
for Low Profile




T Profile




Frame Profile for
Recessed Wells



Aluminium
Finishing Profile



T Profile for
Low Profile



Expansion Strip



Plan.b


High-quality, stylish brush system for dirt control

- A combination of durable nylon brushes embedded in flexible 100% recycled PVC strips.
- Strips are linked via flexible, stainless steel wires.
- Brushes remove soil, grit and debris by 'brushing' the contour of shoes.
- Install in recessed matwells or lay to surface with optional edging.
- Suitable for indoor and outdoor use.
- Fire tested to: CfI-S2.
- Custom-made to order with a choice of 13 colour-ways and bespoke logo options.
- Production techniques allow for matting with curves, diagonals and angles.



Material:	100% recycled PVC rails. Nylon brushes. Stainless steel connecting wires.
Surface Finish:	Brushes
Product Height:	22mm
Environmental Resistance:	Suitable for wet and dry environments.
UV Resistance:	Yes - UV-stabilised
Typical Applications:	Inside / Outside use
Installation Method:	Rollable
Flame Retardancy:	Fire tested to CfI-S2
Country of Origin:	Holland
Warranty:	5 Years

Profile

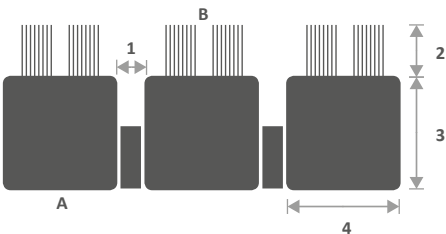

Material Key	Dimensions
A 100% PVC	1 4mm
B Nylon brushes	2 7mm
	3 15mm
	4 15mm

Brush Colour Range





Plan.c


Reversible closed surface aluminium entrance matting




- A robust aluminium system for high traffic entrances.
- Two surface options:
 1. Rubber profiles with nylon filaments.
 2. Rubber scraper profiles.
- Assembled in modules for easier transportation and installation.
- Profiles are connected via heavy-duty steel wire.
- Suitable for indoor use.
- Fire tested to: Bfl-S1.
- Custom-made to order.

Material:	Rubber profile Alluminium and Buffed Rubber Strips
Surface Finish:	Nylon filaments or Black rubber inserts
Product Height:	18mm
Environmental Resistance:	Suitable for wet and dry environments.
UV Resistance:	Yes
Typical Applications:	Inside / Outside use
Installation Method:	Rollable
Product Performance:	Slip tested to R10
Flame Retardancy:	EN ISO 9239-1
Country of Origin:	Holland
Guarantee:	10 Years

Standard Profile

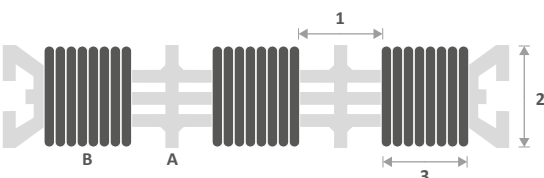


Low Profile

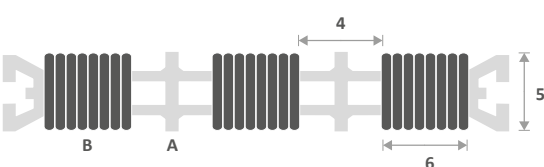


Material Key	Dimensions
A Rubber Profile	1 15mm 4 15mm
B Aluminium	2 18mm 5 12mm
	3 15mm 6 15mm

Nylon Filaments




Black



Beige

Rubber Scraper



Black Rubber

Premier Range

A range of quality PVC/carpet interlocking tiles for commercial entrance areas, ideal for high volume footfall. Versatile, cost-effective and easy to install in recessed matwells or laid to surface with bevelled edging. The PVC base tile in all options is manufactured from 100% recycled materials making the Premier range an environmentally-friendly choice.





NEW

Premier Rib

The perfect anti-slip scraper to accompany Premier Plus or Premier Track

- Ideal for use at the point of entry before the other Premier tiles in order to remove moisture and debris from footwear.
- Ribbed rubber inserts ensure reduced risk of slipping.
- Easy to install, clean and maintain.
- Links directly with Premier Plus & Premier Track tiles.




Material:	Recycled PVC base tile with natural rubber inserts
Surface Aspect:	Fine fluted
Product Height:	12mm
Warranty:	5 years

Size	Black	Weight
400mm x 350mm	PR010101	1.4 kg



Profile

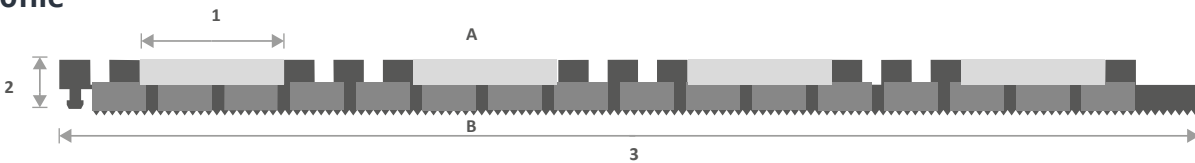

Tile Size	Material Key	Dimensions
30cm x 45cm	<p>A Fine fluted natural rubber</p> <p>B 100% Recycled PVC</p>	<p>1 58mm</p> <p>2 12mm</p> <p>3 300mm</p>



Premier Plus

Ideal for recessed entrance wells


- Quality needlepunch carpet insert.
- Effectively scrapes dirt and wipes moisture.
- Links together to cover all floor sizes – indoor use.
- Move, clean or replace individual tiles with ease.
- Flexible - easily cut to shape.
- Fire tested to EN13501 Euro Classification E(F1).
- Tile base is colourfast to light: BS EN ISO 105 B02:1999.



Product Height:	18mm
Flame Retardancy:	Fire tested to EN13501 Euro Classification E(F1)
Warranty:	5 years

Size	Charcoal	Grey	Weight
30cm x 45cm	PMP010101	PMP010601	1.20 kg

Needlepunch - Polypropylene Carpet




Charcoal



Grey



Profile

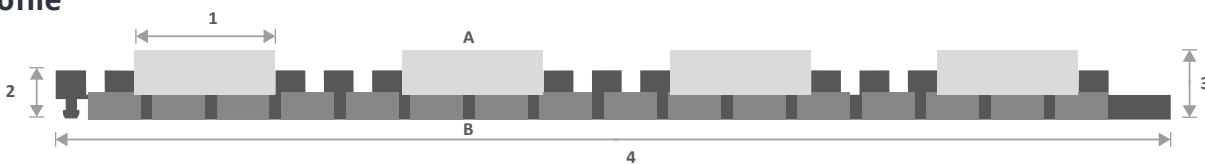

Tile Size

30cm x 45cm

Material Key

- A** Polypropylene carpet
- B** 100% Recycled PVC

Dimensions

- 1** 38mm
- 2** 12mm
- 3** 18mm
- 4** 300mm



Premier Track

Interlinking tile with nylon carpet inserts

- Ideal for recessed entrance wells.
- Crush-resistant nylon carpet insert.
- Effectively scrapes dirt and wipes moisture.
- Suitable for wheeled trolleys.
- Safe for high heeled footwear.
- Move, clean or replace individual tiles with ease.
- Fire tested to EN13501 Euro Classification B(F2)S2.
- Slip tested to BS 7976-2:2002 Pendulum Test.



Product Height:	16mm
Product Performance:	Slip tested to R10. Load tested to 1,000 kg. This means that these tiles can withstand supermarket supply trolleys.
Flame Retardancy:	Fire tested to EN13501 Euro Classification B(F2)S2
Warranty:	5 years

Size	Anthracite	Blue	Weight
30cm x 45cm	PT010101	PT010201	1.20 kg
	Brown	Grey	Weight
	PT010501	PT010601	1.20 kg

Alba - Nylon Carpet




Anthracite

Blue

Brown

Grey

Profile

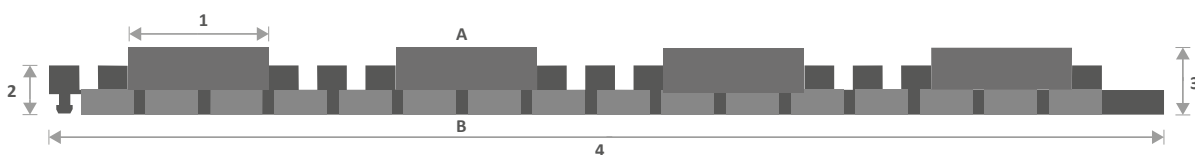

Tile Size


30cm x 45cm

Material Key

- A** Nylon carpet
- B** 100% Recycled PVC

Dimensions


- 1** 38mm
- 2** 12mm
- 3** 16mm
- 4** 300mm

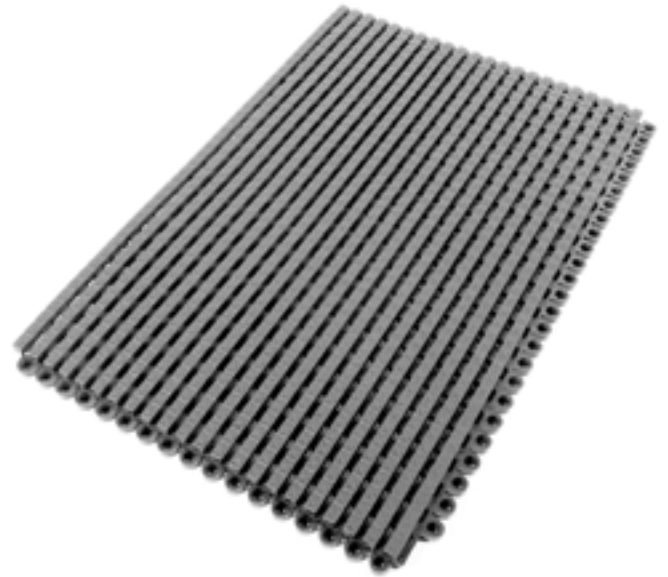

Premier Grip

100% recycled PVC


- Suitable for use indoors and outdoors.
- Dirt-scraping raised nodules.
- Small holes provide efficient drainage.
- Suitable for wheeled access.
- Easy to install, clean and maintain.
- Fire tested to EN13501 Euro Classification B(F1)S1.
- Links directly with Premier Plus & Premier Track tiles.




Product Height:	12mm
Product Performance:	DIN 51130: 1992 Testing of floor covering – Determination of slip resistance – Work rooms and areas of work with an increased risk of slipping –
Flame Retardancy:	Fire tested to EN13501 Euro Classification E(F1)
Warranty:	5 years

Size	Black	Weight
30cm x 45cm	PG010001	1.15 kg

Profile

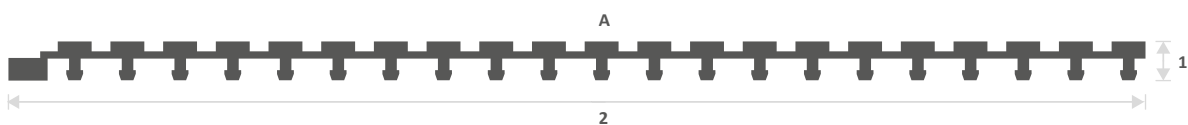

Material Key	Dimensions
A 100% recycled PVC	1 12mm 2 300mm

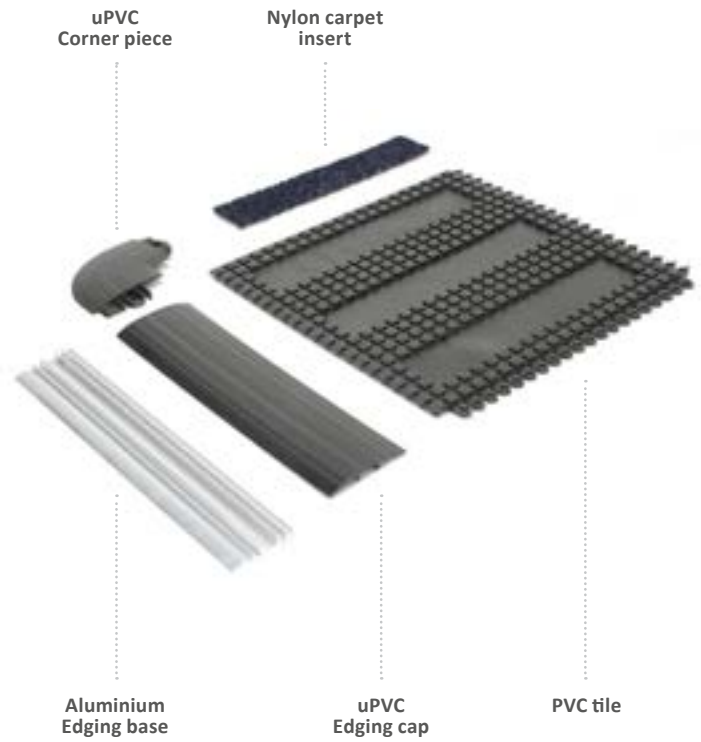

Premier Surface

No need for a matwell

- Interlocking entrance tiles designed to be laid to surface.
- Does not require a matwell.
- Solid surface tiles effectively capture dirt to protect interior floors.
- Hardwearing nylon carpet inserts scrape dirt and wipe moisture.
- PVC base tile is manufactured from 100% recycled materials.
- Suitable for high volume footfall in commercial locations.
- Optional 'impact-resistant' bevelled edges and corners and T-pieces withstand heavy shopping trolleys.
- Co-ordinating Alba carpet can also be supplied in rolls for primary and secondary dirt barrier use.
- Slip tested to BS 7976-2:2002 Pendulum Test.



Size	Anthracite	Blue	Weight
30cm x 30cm	PSC010101	PSC010201	0.60 kg
	Brown	Grey	Weight
	PSC010501	PSC010601	0.60 kg
Edging	Black		Weight
Edging: 78mm x 2.0m lengths	PSE00002		
Corners: 100mm x 100mm	PSC00004		0.05 kg

Product Height:	12mm
Product Performance:	Slip tested to BS 7976-2:2002 Pendulum Test


Alba - Nylon Carpet



Anthracite



Grey



Blue




Brown



Black

No Carpet

Profile

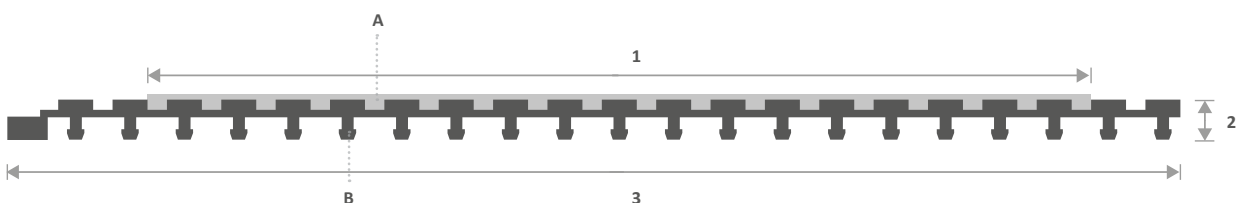

Material Key

- A Nylon carpet insert
- B PVC tile

Accessories

Edging: 78mm x 2.0m lengths
Corners: 100mm x 100mm

Dimensions

- 1 260mm
- 2 9mm
- 3 300mm



PathMaster

A cost-effective, more versatile alternative to traditional aluminium systems

- Needle-punch carpet with inlaid aluminium scraping strips.
- Solid surface prevents debris falling through.
- Supplied on flexible rolls of up to 10m lengths in 1m or 2m widths – simply butt tightly together for desired width
- Install in recessed wells or glue to the floor surface with optional bevelled edging.
- Cut to size and shape, onsite if necessary, using a hand grinder or jigsaw.
- Anti-slip latex backing.



Material:	Tufted nylon or Needle-punch and Aluminium
Product Height:	13mm
Product Weight:	4.5Kg/m ²
Roll Length:	10m
Durability:	Medium to heavy traffic entrances
Pile Yarn Composition:	92% nylon surface with 8% polypropylene
Flame Retardancy:	Flammability tested - Class E
Country of Origin:	Belgium
Permanent Adhesive Recommendation:	Adhesive recommended by F.Ball for permanent bond: F3, and for heavy-duty/wet areas: F74, F81 or F84.

Sizes	Anthracite	Weight	Blue	Weight
2m x 10m	PM010004	75.00 kg	PM020004	150.00 kg
2m x per linear metre	PM010004C	7.50 kg	PM020004C	15.00 kg
1m x 10m	PM010005	75.00 kg	PM020005	75.00 kg
1m x per linear metre	PM010005C	7.50 kg	PM020005C	7.50 kg

Profile



Material Key

- A Tufted nylon
- B Aluminium

Dimensions

1 13mm

Colour options



Anthracite



Blue



PathMaster Budget

The most budget-conscious entrance matting available to feature aluminium

- 100% Polypropylene needlepunch carpet with aluminium scraping inserts.
- Supplied on flexible rolls of up to 10m lengths in 2m widths – simply butt tightly together for desired width.
- Install in recessed wells or glue to the floor surface with optional bevelled edging.
- Cut to size and shape, on site if necessary, using a hand grinder or jigsaw.



Material:	100% polypropylene
Backing:	Latex
Product Height:	14mm
Roll Length:	10m
Durability:	Medium to heavy traffic entrances
Pile Yarn Composition:	100% polypropylene
Pile Weight:	1450g/m ² ± 7.5%
Country of Origin:	Belgium
Permanent Adhesive Recommendation:	Adhesive recommended by F.Ball for permanent bond: F3, and for heavy-duty/wet areas: F74, F81 or F84.

Size	Charcoal	Grey	Weight
2m wide x per linear metre (max. 10m)	PMB010004	PMB060004	75.00 kg

Colour Options
(Delivery 5 working days)

Colour Options
(Delivery 15 working days)



Charcoal

Grey

Beige

Brown



PathMaster Duo

Functional matting with a contemporary design

- Solid surface prevents debris falling through.
- Supplied on flexible rolls of up to 20m lengths in 2m widths – simply butt tightly together for desired width.
- Install in recessed wells or glue to the floor surface with optional bevelled edging.
- Cut to size and shape, onsite if necessary, using a hand grinder or jigsaw.
- Anti-slip latex backing.



Backing:	Latex
Product Height:	13mm
Durability:	Medium traffic entrances
Pile Yarn Composition:	100% polypropylene fibres with UV protection and 100% polyamide brushes
Flame Retardancy:	Flammability rating EN 13501-1: Class E
Country of Origin:	Belgium
Permanent Adhesive	Adhesive recommended by F.Ball for permanent bond: F3, and for heavy-duty/wet areas: F74, F81 or F84.
Recommendation:	

Size	Charcoal	Grey	Weight
2m wide x per linear metre (max. 20m)	PMD010001	PMD060001	120.00 kg

Colour options



Charcoal



Grey



Logo Entrance Matting

Communicate your brand - right from the off

- Creates an impressive entrance featuring a customised logo or message for instant brand recognition.
- Pantone® colour matching available for a surcharge if desired.
- Soft carpet pile retains moisture, holding up to 2.5 litres water/m2.
- 11 year warranty against fading.
- Standard sizes are machine washable for easy care.
- Product height is matched to surrounding matting product.
- Made in the UK.

Sizes	Part Code
0.85m x 1.5m	LG0000001
1.15m x 1.75m	LG0000002
Special	LG0000005

It's possible to enhance any one of COBA Flooring's Entrance Matting Systems with a custom printed logomat. Replicate any logo or slogan in up to 6 colours.



Toughrib Contract

Ribbed entrance matting on a roll


- A popular choice for flooring contractors requiring versatile rolls of entrance carpet.
- Ribbed surface not only looks smart, but is designed to scrape dirt and wipe moisture.
- Debris and moisture is captured in the ridges and easily vacuumed.
- 100% polypropylene pile is durable and suitable for heavy-duty use.
- Primary (latex) and secondary (gel foam) backing.
- Can be used in recessed matwells or on pedestrian walkways.



Material:	100% polypropylene
Surface Finish:	Ribbed
Product Height:	7.5mm ± 10%
Product Weight:	1350g/m ²
Roll Length:	30m
Pile Height:	4.5mm ± 10%
Pile Weight:	900g/m ²
Flame Retardancy:	EN 13501-1: Class Ef1.
Durability:	Low to medium traffic entrances
Product Performance:	CE approve
Permanent Adhesive Recommendation:	Adhesive recommended by F.Ball for permanent bond: F3, and for heavy-duty/wet areas: F74, F81 or F84.

Sizes	Brown	Grey	Weight
2m x 30m roll	TR050006	TR060006	61.00 kg
2m x per linear metre	TR050006C	TR060006C	61.00 kg

Colour options




Blue



Charcoal



Grey



Brown



Toughrib Diagonal

Heavy duty diagonally ribbed matting

- Premium quality, heavy-duty entrance matting featuring attractive diagonal ribbed design.
- Supplied in rolls of up to 25m or in cut linear metre lengths.
- 100% solution dyed UV stabilised polypropylene fibres for rigorous scraping performance.
- Features a robust duo rubber backing.
- CE approved to EN14041:2004.
- Flammability: EN13501 Euro Classification Ef1.
- Dry slip-tested to EN14401:2004.




Material:	100% solution dyed UV stabilised polypropylene (PP) fibres
Surface Finish:	Ribbed
Product Height:	8.2mm
Product Weight:	1920g/m ²
Roll Length:	25m
Pile Height:	4mm
Pile Weight:	1150g/m ²
Durability:	Low to medium traffic entrances
Product Performance:	Dry slip-test: EN 14401 : 2004
Flame Retardancy:	EN 13501-1: Class Ef1.
Permanent Adhesive Recommendation:	Adhesive recommended by F.Ball for permanent bond: F3, and for heavy-duty/wet areas: F74, F81 or F84.

Sizes	Charcoal	Blue	Grey	Weight
2m x 25m roll	TRD010001	TRD020001	TRD060001	61.00 kg
2m x per linear metre	TRD010001C	TRD020001C	TRD060001C	2.03 kg

Colour options



Grey



Blue



Charcoal



Alba

Going to great lengths to make an entrance

- Exceptionally durable nylon carpet.
- Ideal for high volume entrance areas, such as walkways and corridors.
- Nylon pile is highly absorbent and also withstands crushing.
- An effective way to protect interior floor surfaces.
- Available with optional edging depending on the requirements of the application.
- Suitable for glue down, wall to wall, or floor surface applications.
- Can be used as part of a two step system in heavy traffic environments.




Material:	Nylon
Backing:	PVC
Surface Finish:	Cutpile
Product Height:	9.2mm
Roll Length:	20m
Pile Height:	5.2mm ± 0.5
Mat Edge:	25mm thickness
Durability:	Medium to heavy traffic entrances
Absorbency:	5l/m ²
Pile Yarn Composition:	100% PA6
Pile Weight:	900g/m ²
Flame Retardancy:	Fire tested to Cf-S1 EN 14041
Permanent Adhesive Recommendation:	Adhesive recommended by F.Ball for permanent bond: F45, and for heavy-duty/wet areas: F74, F81 or F84.

Sizes	Brown	Grey	Weight
1m x per linear metre	AB050009	AB060009	3.49 kg
2m x per linear metre	AB050008	AB060008	6.98 kg

Colour options



Charcoal



Grey



Blue



Brown



Needlepunch

Versatile needlepunch entrance matting carpet

- Textured polypropylene fibres provide outstanding scraper action.
- Popular for both interior walkways and reception areas providing a total dirt-barrier solution.
- Also frequently used in recessed matwells in entrance areas.
- Available with optional edging.
- Suitable for glue down, wall to wall, or lay to surface applications.



Material:	100% polypropylene
Backing:	Waffle
Surface Finish:	Ribbed
Product Height:	10.8mm
Product Weight:	2.5Kg/m ²
Roll Length:	21m
Pile Height:	5.2mm ± 0.5
Durability:	Medium to heavy traffic entrances
Pile Yarn Composition:	100% polypropylene
Pile Weight:	1450g/m ² ± 7.5%
Flame Retardancy:	Flammability rating to BS EN 13501-1: Class Efl.
Permanent Adhesive Recommendation:	Adhesive recommended by F.Ball for permanent bond: F3, and for heavy-duty/wet areas: F74, F81 or F84.

Sizes	Charcoal	Grey	Weight
1m x per linear metre (max 21m)	NP010003C	NP060003C	3.00 kg
2m x per linear metre (max 21m)	NP010001C	NP060001C	6.00 kg
2m x 21m	NP010001	NP060001	105.00 kg
1m x 21m	NP010003	NP060003	52.50 kg

Colour options



Charcoal



Grey



NEW

Treadwell

Entrance floor tile made from recycled materials

- Tiles can be installed in recessed matwells.
- Manufactured from recycled tyres.
- Looks stylish when laid in uniform or parquet.
- Pattern complements an array of interiors.



Material:	100% Recycled rubber tyre and belt material
Surface Aspect:	Buffed, chenille-like nylon
Product Height:	10mm
Primary Backing:	Non-flammable solid adhesive base
Tensile Strength:	Longitudinal > 1500 psi
Slip Resistance:	Dry >1, Wet 0.98 (per ASTM F1677)
Abrasion Resistance:	Wear index, 1/g = 53.9
Flame Retardancy:	Radiant Panel, M3 (per NFP 92-506)

Size	Natural	Weight
305mm x 305mm	TW050001	0.75 kg



Octoroll

Extremely tough rubber matting by the metre

- The ideal choice for demanding entrances.
- Large holes allow debris to fall through the mat.
- The surface pattern scrapes dirt and debris from footwear.

Material:	NBR
Surface Aspect:	Holes
Product Height:	13mm
Environmental Resistance:	Ideal for both indoor and outdoor applications
UV Resistance:	Yes
Installation Method:	Loose lay
Operating Temperature:	-20°C to +160°C
Country of Origin:	India

Size	Black	Weight
1m x 9.3m	RM010014	11 kg
1m x per linear metre	RM010014C	0.8 kg




Tough-Lock

A smart solution for floor refurbishment


- Smart interlocking tile manufactured from resilient PVC.
- Available in two finishes – Studded and Textured.
- Effective for refurbishing floors, such as covering damaged surfaces.
- Suitable for heavy and light industrial use, as well as commercial locations.
- Can withstand the weight of most forklift trucks.
- Tile system simply interlocks for easy installation.
- Available in Anti-Static and ESD versions on request.
- Bevelled edging available.

Material:	PVC
Surface Finish:	Studded/Textured
Product Height:	5mm or 7mm
Operating Temperature:	-15°C to +30°C
Resistant to Chemicals:	DIN 51958 - Hydrochloric Acid =B7 96% Ethanol =B7 = 96% Methanol=B7=20 100% Acetic Acid =B7 100% Nitric Acid=B7 Acetone, Engine=20 Oils, Gasoline, Urine69% Sulphuric = Acid=B7 98%=20 Chromic Acid =B7 40% Toluene.
Environmental Resistance:	Suitable for heavy and light industrial use, as well as commercial locations.
Installation Method:	Tiles interlock
Accessories:	Bevelled Edging
Product Performance:	Anti-slip ASTM C 1028/89
Flame Retardancy:	DIN 51960
Country of Origin:	Ireland

Colour options



Black



Grey



Blue



Red



Green



Yellow

Studded Tile	0.5m x 0.5m x 7mm					
	Black	Grey	Blue	Red	Green	Yellow
	TLS010002H	TLS060002H	TLS020002H	TLS030002H	TLS040002H	TLS070002H

Textured Tile	0.5m x 0.5m x 5mm				
	Black	Grey	Blue	Red	Green
	TLT010003H	TLT060003H	TLT030003H	TLT040003H	TLT040002H

Textured Tile	0.5m x 0.5m x 7mm					
	Black	Grey	Blue	Red	Green	Yellow
	TLT010002H	TLT060002H	TLT060002H	TLT030002H	TLT060002H	TLT070002H



Tough-Lock Eco

An economical floor covering made from 100% recycled materials

- Smart interlocking tile manufactured from 100% recycled PVC.
- Studded surface design.
- Effective for refurbishing floors, such as covering damaged surfaces.
- Suitable for heavy and light industrial use, as well as commercial locations.
- Can withstand the weight of most forklift trucks.
- Tile system simply interlocks for easy installation.
- Bevelled edging available.

Material:	100% recycled PVC.
Surface Finish:	Studded
Product Height:	5mm
Environmental Resistance:	Suitable for heavy and light industrial use, as well as commercial locations.
Installation Method:	Tile system simply interlocks
Operating Temperature:	-10°C to 60°C
Accessories:	Bevelled Edging
Country of Origin:	China

Tile Size	Black	Weight
500mm x 500mm (pack of 4)	TLS010001E	6.60 kg





Studded Tile

Durable studded rubber floor tile

- Hardwearing natural/synthetic rubber floor tile with studded design.
- Popular for many commercial environments.
- Raised studs provide some slip-resistance underfoot.
- Extensive colour palette.
- Free from PVC, Plasticizers and Formaldehyde.
- Applied by adhesion to the floor.

Material:	Rubber
Product Height:	2.5mm
Flame Retardancy:	EN13501-1 Class C(fl) s1
Country of Origin:	China

Tile Size	Blue	Oyster White	Weight
485mm x 485mm x 3mm	SRTA116	SRTA117	1.25 kg

Colour options



Black



Light Grey



Dark Grey



Blue





Oyster White

COBAGRIP®

COBAGRIP is a range of UV stabilised GRP sheets, treads and stair nosing designed to offer exceptional levels of slip-resistance both indoors and out, while having outstanding wear and tear qualities. It is an ideal underfoot safety solution for pedestrian and factory walkways, access ramps, gangways and bridges.

The Silicone Carbide 'gritted' top surface provides effective underfoot grip and is resistant to most solvents and chemicals. It is manufactured using flame retardant materials. Easy to install, simply bond or screw to the existing floor surface, COBAGRIP is a cost-effective means of refurbishing damaged or slippery floors. Easy to clean (pressure wash).

The ultimate anti-slip flooring for external and internal use.

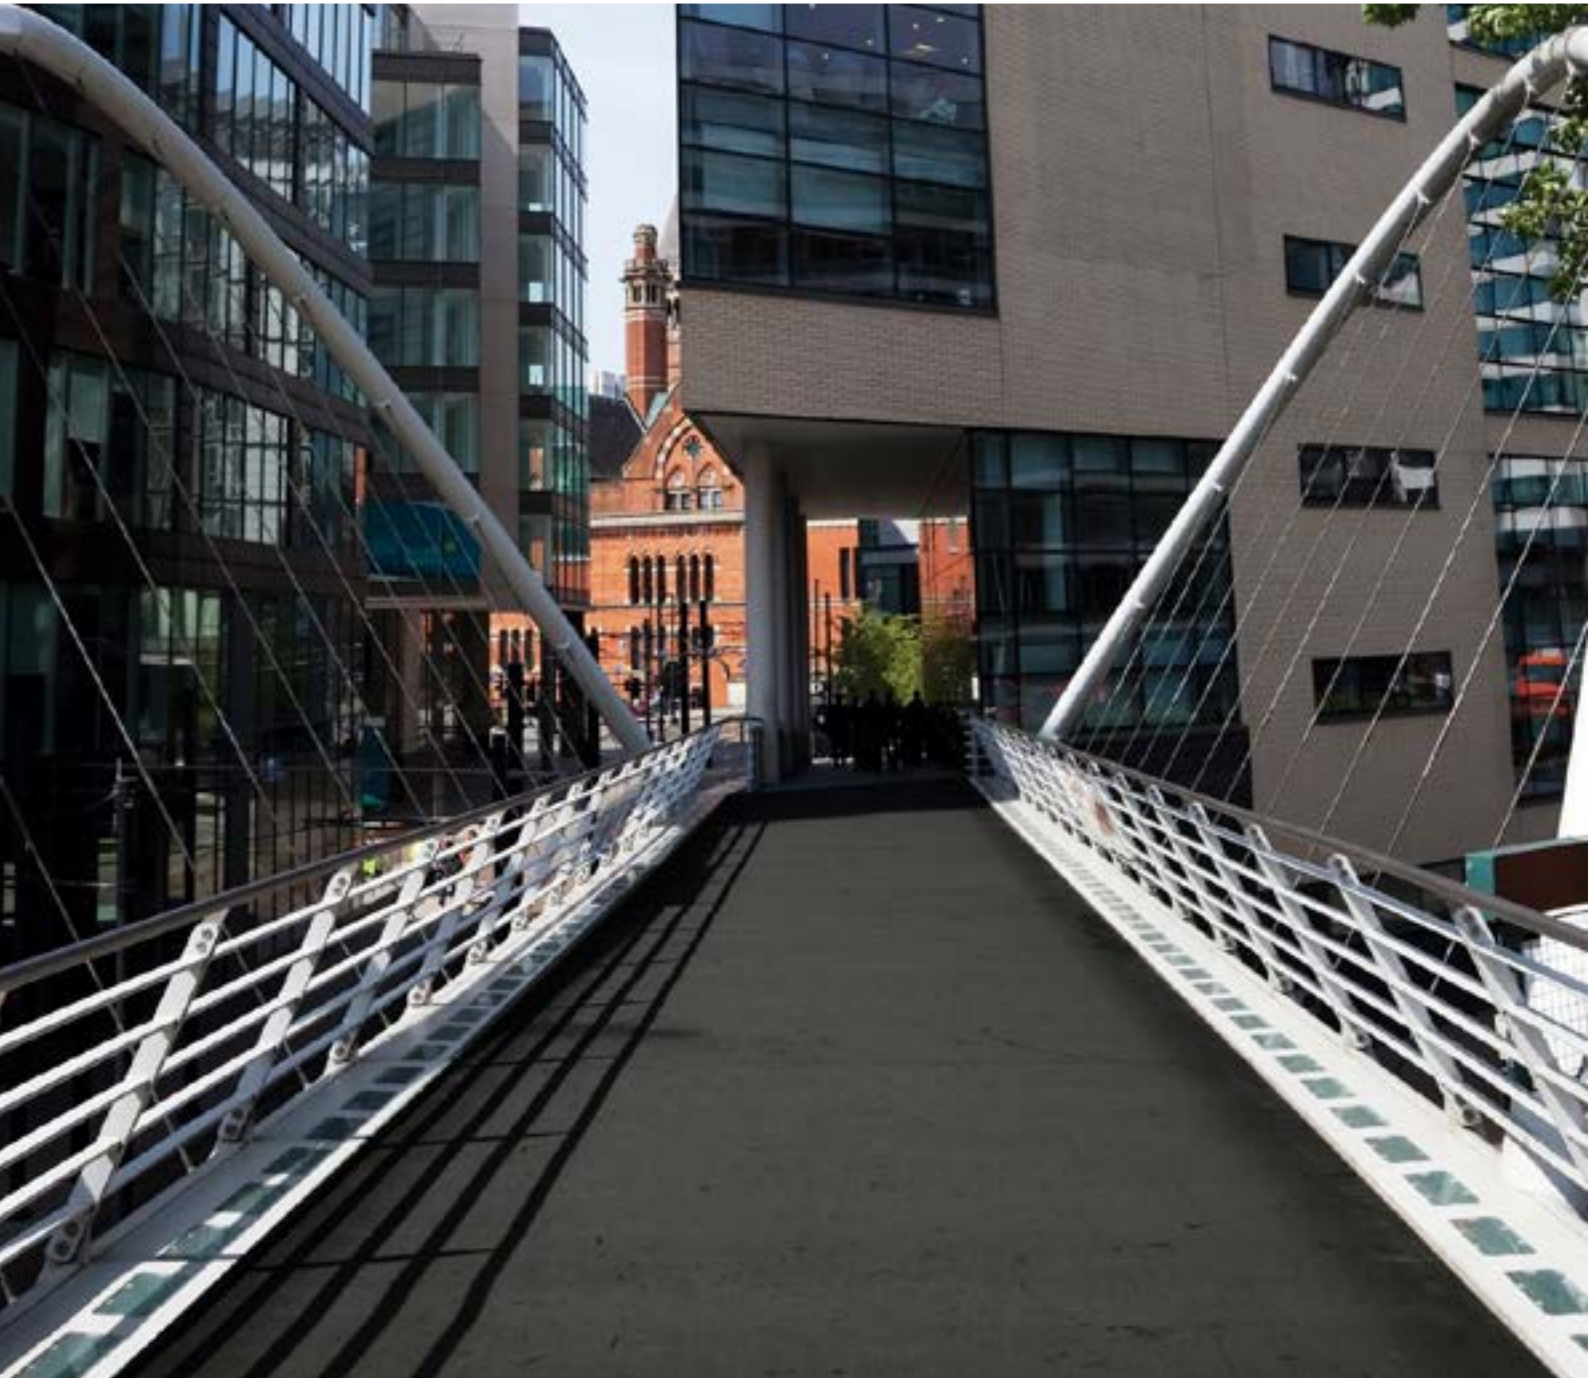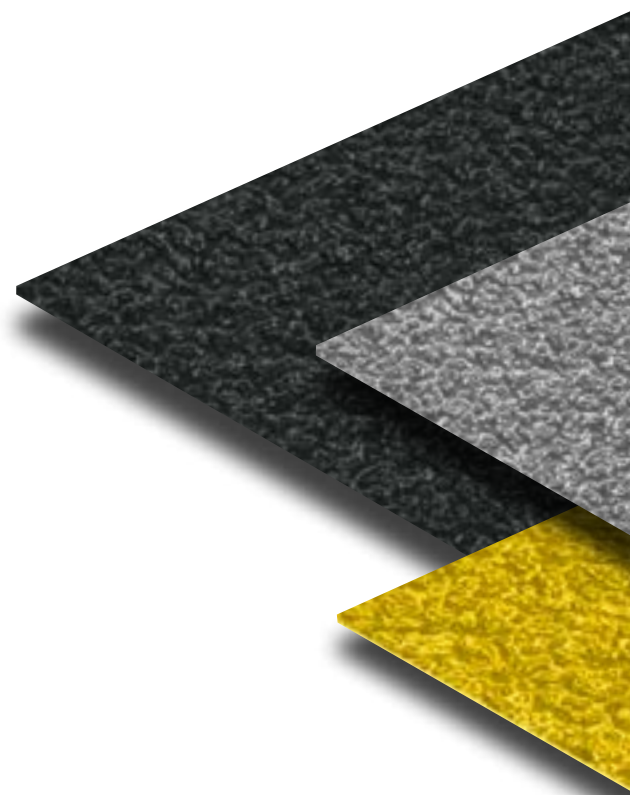



COBAGRiP® Sheet


Ideal solution to combat slip hazards such as spilt liquids or ice

- Available in a range of colours to meet all DDA requirements.
- Suitable for use with forklift traffic.
- Simply bond or screw to the existing floor surface.
- Colour options: black, grey and yellow.
- Product height: 3mm, GRP base, 5mm overall.

Colour options



Black



Grey



Yellow

COBAGRiP® Light

Manufactured from a 1mm flexible GRP sheet

- Ideal for use on undulating surfaces.
- Can also be used in food production areas.
- Product height: 1mm GRP Base, 3mm overall.

Colour options



Black



Grey



Yellow

Material:	Silicone Carbide
Installation Method:	Bond or screw to surface
Cleaning Method:	COBAGRiP should be almost maintenance free in most outside environments. Natural elements will have the effect of cleaning COBAGRiP. Brushing and flushing with a mild detergent solution may be desirable now and again to restore appearance.
Product Performance:	Slip tested to R13 in accordance with BS 7976-2:2002 <ul style="list-style-type: none"> • PTV 79 in dry conditions • PTV 73 in wet conditions
Flame Retardancy:	Fire tested to EN 9239-1:2010
Country of Origin:	China

Sheet	Black	Grey	Yellow	Weight
1.2m x 2.4m - 5mm	GRP010001	GRP060001	GRP070001	23.60 kg
1.2m x 1.2m - 5mm	GRP010002	GRP060002	GRP070002	10.08 kg
0.8m x 1.2m - 5mm	GRP010003	GRP060003	GRP070003	7.70 kg

Light	Black	Grey	Yellow	Weight
1.2m x 2.4m - 3mm	GRP010001L	GRP060001L	GRP070001L	17.00 kg
1.2m x 1.2m - 3mm	GRP010002L	GRP060002L	-	10.08 kg
0.8m x 1.2m - 3mm	GRP010003L	GRP060003L	-	6.00 kg



COBAGRiP® Stair Nosing

Designed to help prevent slips on stairs

- Suitable for use on existing or new-build steps.
- Manufactured with chamfered back edge for additional safety.
- Bright colour for visibility meeting DDA requirements.



Stair Nosings	Yellow	Weight
3m x 55mm x 55mm	GRP070001N	1.80 kg
2m x 55mm x 55mm	GRP070002N	1.20 kg
1.5m x 55mm x 55mm	GRP070003N	0.90 kg
1m x 55mm x 55mm	GRP070004N	0.60 kg

COBAGRiP® Stair Tread

Silicone Carbide surface helps to prevent slip accidents on stairs

- Designed to fully cover the stair area.
- 55mm x 55mm contrasting coloured nosing meeting DDA requirements.
- Can be used in conjunction with COBAGRiP Sheet.



Stair Treads	Black/Yellow	Black/White	Weight
3m x 345mm x 55mm	GRP010701S	GRP010131S	6.60 kg
2m x 345mm x 55mm	GRP010702S	GRP010132S	4.40 kg
1.5m x 345mm x 55mm	GRP010703S	GRP010133S	3.30 kg
1m x 345mm x 55mm	GRP010704S	GRP010134S	2.20 kg

 +44 (0)116 240 1161
 contact@cobaflooring.com
 www.cobaflooring.com
 @COBAFlooring
 COBAFlooring



NBS Specification: N10 / 300
NBS Create clause: 45-35-35/420
BIM Uniclass2015: Pr_35_57_11_26

